


### Cygnus Bath shower mixer

ILLUSTRATION	FEATURES AND BENEFITS:
	Complete your bathroom with the elegantly rounded lines of Cygnus bath and shower accessories. All of these fittings are made of solid brass with a chrome finish. Available with a side extension kit to hold handset at side of tap (see photo)
<b>AVAILABILITY/ PRODUCT CODES:</b>	
cygt812cp Bath shower mixer	
<b>NOTES:</b>	
Working pressure 0.5 bar, tested to 10 bar Cygnus Floor Standing Legs (700MM) – Cygt816cp Kit With Bracket - Gt8122gt812ext	
<b>CARE AND MAINTENANCE INSTRUCTIONS:</b>	
Clean regularly, wipe with a clean damp cloth, followed by a clean dry cloth. Abrasive or cream cleaners should <b>NOT</b> be used. For marks which are difficult to remove in this way, use sparingly and infrequently a 'multi use metal polish' recommended for the finish of your product.	

*C.P. Hart cannot guarantee the accuracy of this information.*

*Dimensions are nominal – for guidance only and are not to be used for pre-installation.*


For further information call Central Sales on 0845 600 1950

For projects & developments call the Contracts Team on 0845 600 1980

[www.cphartboutique.co.uk](http://www.cphartboutique.co.uk) [www.cphart.co.uk](http://www.cphart.co.uk)

### INSTALLATION INFORMATION / REQUIREMENTS:

- Locate Bath/Shower Mixer Body, with the Diverter lever to the front, through the previously drilled holes and tighten the back nuts.
- Connect to pipe work. Hot on the LHS and Cold on the RHS. The hot water valve opens anticlock wise and the cold opens clock wise. NB: For ease of maintenance, it is recommended that service valves are fitted to both the hot and cold feeds
- Locate the Spout to the Bath Deck Filler Body and tighten the grub screw.
- Locate the Hand shower Wall Mounting to an appropriate position adjacent to the Bath/Shower Mixer and screw to the wall.
- Locate the Hand shower to the Hand shower hose and screw the hose to the Bath/Shower mixer body and fit the Hand Shower in the wall mounting.
- With the Flow Straightener removed, thoroughly flush the system. Replace the Flow Straightener.
- Test the Hand Shower/hose by opening the hot and cold water valves and operating the Diverter lever.

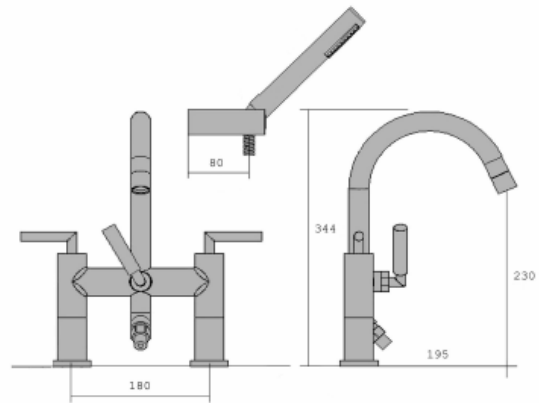


*C.P. Hart cannot guarantee the accuracy of this information.*

*Dimensions are nominal – for guidance only and are not to be used for pre-installation.*

For further information call Central Sales on 0845 600 1950

For projects & developments call the Contracts Team on 0845 600 1980

[www.cphartboutique.co.uk](http://www.cphartboutique.co.uk) [www.cphart.co.uk](http://www.cphart.co.uk)

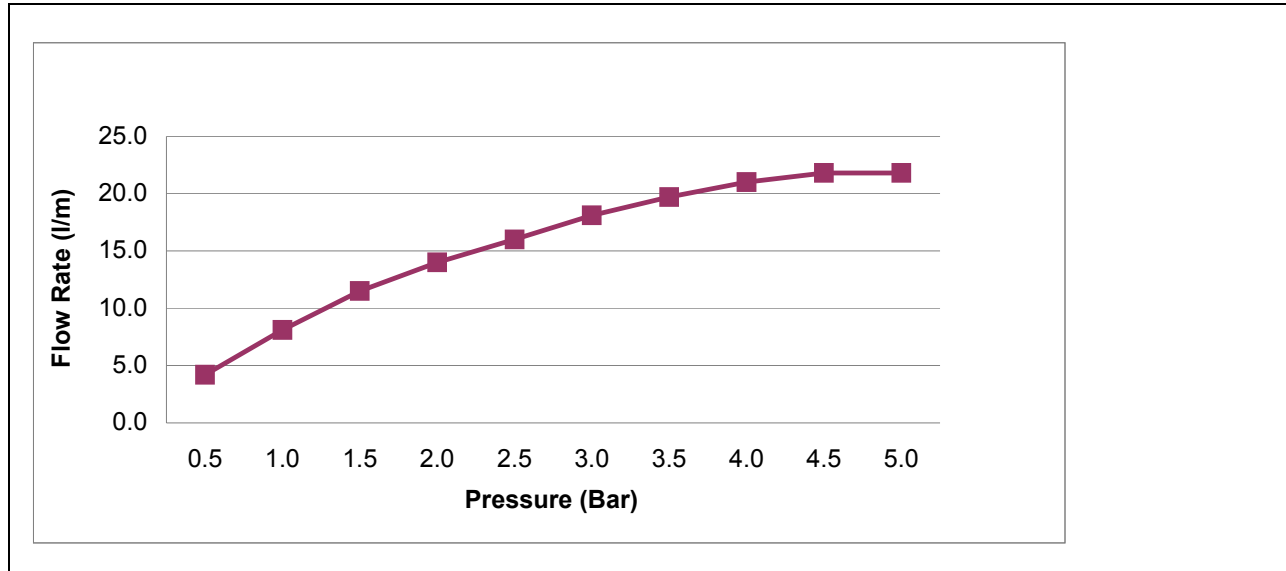

*C.P. Hart cannot guarantee the accuracy of this information.*

*Dimensions are nominal – for guidance only and are not to be used for pre-installation.*

For further information call Central Sales on 0845 600 1950

For projects & developments call the Contracts Team on 0845 600 1980

[www.cphartboutique.co.uk](http://www.cphartboutique.co.uk) [www.cphart.co.uk](http://www.cphart.co.uk)